


Saved: 01 DEC 2012 02:48:01

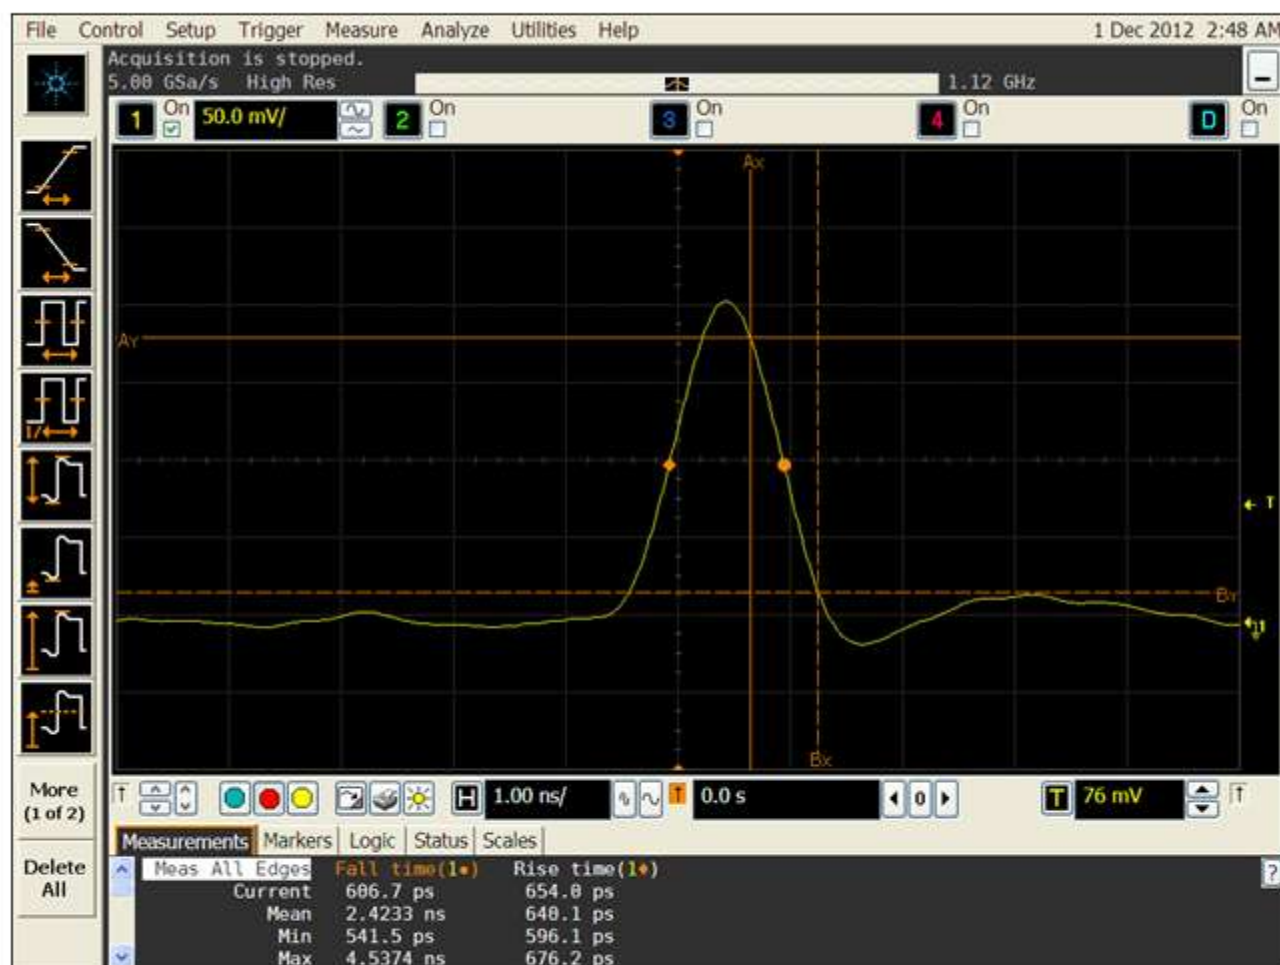

Acquisition: Sampling Mode real time, High Resolution
Analog Memory Depth automatic 1.000 kpts, Digital 401 pts
Analog Sampling Rate automatic 5.00 GSa/s, Digital automatic 2.00 GSa/s
Analog Averaging off, Interpolation Auto

Channel 1: Scale 50.0 mV/, Offset 105.0 mV, Skew 0.0 s
Coupling DC, Impedance 50 Ω

Horizontal: Scale 1.00 ns/, Position 0.0 s, Reference center

Trigger: Mode edge, Source Channel 1, Level 76 mV, Slope rising
AND (Qualifier) Source Channel 3, Level 94 mV, Value L
Sweep triggered, Sensitivity normal, Holdoff Time 100 ns

Measure:

Meas	All Edges	Fall time(1*)	Rise time(1*)
Current		696.7 ps	654.0 ps
Mean		2.4233 ns	640.1 ps
Min		541.5 ps	596.1 ps
Max		4.5374 ns	676.2 ps
Range (Max-Min)		3.9958 ns	80.1 ps
Std Deviation		2.0318 ns	26.9 ps

Number of Meas	6	6
Meas Window	All Data	All Data
Drag&Drop Time		
Edge Direction	Falling	Rising

Markers:

Meas All Edges	Fall time(1*)	X	Y
Current	606.7 ps	A—(1) = 642.1 ps	183.763 mV
Mean	2.4233 ns	B---(1) = 1.2488 ns	19.256 mV
Min	541.5 ps	Δ = 606.7 ps	-164.507 mV
Max	4.5374 ns	1/ Δ X = 1.6482 GHz	
Range (Max-Min)	3.9958 ns		
Std Deviation	2.0318 ns		
Number of Meas	6		
Meas Window	All Data		
Drag&Drop Time			
Edge Direction	Falling		