


Alternative APD hookup footprints

Better Mechanical Robustness

Dual Row

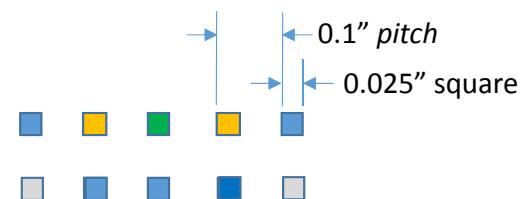


Better Mechanical Robustness

- Signal with individual foil connection
- Reference
- Optional Reference
- Signal or Reference

■ ■ ■ ■ ■ Single Row

Smallest footprint.

Dual Row Header




Right Angle Black Insulator

HWS6559

NUMBER OF PINS: 10
2X5 DUAL ROW BREAKAWAY
RIGHT ANGLE
HEADER .1"(2.54mm) CENTERLINE
(.1"Pin spacing .1"Row spacing)
.025" SQUARE POSTS
.235" MATING SIDE POST LENGTH
GOLD FLASH PLATING

\$0.246

Single Row Header
Right Angle



Low Profile Black Insulator

HWS4015

NUMBER OF PINS: 5
1X5 SINGLE ROW BREAKAWAY
RIGHT ANGLE LOW PROFILE
HEADER .1"(2.54mm) CENTERLINE
.025" SQUARE POSTS
.235" MATING SIDE POST LENGTH
GOLD FLASH PLATING

\$0.119