

Torricelli's Law for Large Holes

Johann Otto


Höhere Technische Bundeslehr- und Versuchsanstalt, Wiener Neustadt, A-2700 Austria

Kirk T. McDonald

Joseph Henry Laboratories, Princeton University, Princeton, NJ 08544

(May 15, 2018; updated September 15, 2018)

Torricelli's law appeared on pp. 191-192 of [1] (1644), where he observed that a water jet, which emerges from a small, upwards facing hole B in a suitable projection from the bottom of a tank A, rises to the same height C as the water level D in the tank. The upwards velocity at B is the same as the downwards velocity at E, namely $\sqrt{2gh}$, where g is the acceleration due to gravity, and h is the height of the water level D above points B and E.



Torricelli's law was first explained by D. Bernoulli, p. 37 of [2],¹ via an energy argument that will be reviewed below. Nowadays, Torricelli's law is typically presented as an example of the steady-state Bernoulli equation, which does lead to the prediction that the water emerges from a hole with velocity $v = \sqrt{2gh}$ when the hole is at depth h below the water level in the tank. However, if the area a of the hole (in the bottom of the tank) is the same as the cross-sectional area A of the tank, the water simply falls out of the tank with acceleration g due to gravity, and velocity at the bottom of the tank given by $v = \sqrt{2g(h_0 - h)}$, where h_0 is the initial depth of water in the tank.

That is, water flowing from a tank is not a steady process, and so Bernoulli's equation applies only in the limit of very small holes, for which the flow is essentially steady.

1 Bernoulli's Analysis for Large Holes

Bernoulli's original analysis of Torricelli's example did not assume that the area a of the hole was small compared to the cross-sectional area A of the water tank

We follow Bernoulli in assuming that the exit hole is at the center of the bottom of a right-circular-cylindrical tank. We further assume that the flow velocity in the tank is essentially vertical, and ignore the small, horizontal component of the water-flow velocity. As such, Bernoulli's solution (and the alternative solutions presented in this note) cannot be correct in all detail.

We also suppose that the water is incompressible, and inviscid (so that no energy is lost to friction during the flow). Then, the continuity equation relates the (vertical) velocity v of water in the tank to the (vertical) velocity V of the water at the exit hole according to,

$$v = \frac{aV}{A}. \quad (1)$$

Also, the velocity v is the rate of change with respect to time t of the depth h of water in the tank,

$$v = -\frac{dh}{dt} \equiv -\dot{h} = \frac{aV}{A}. \quad (2)$$

¹See also [3].

Bernoulli's method (an innovation in 1738) was to set the rate at which work is done by gravity on the water in the tank equal to the rate of change of kinetic energy of the water in the tank plus the rate at which kinetic energy exits the tank through the hole. That is, the method is based on conservation of energy.

The rate dW/dt of gravitational work on the water in the tank at time t is the product of the rate $\rho g v$ of gravitational work per unit volume, and the volume Ah of the water in the tank,

$$\frac{dW}{dt} = \rho g v Ah = \rho g V a h, \quad (3)$$

where ρ is the mass density of the water.

The total kinetic energy of the water in the tank is the product of the kinetic energy per unit volume $\rho v^2/2$ and by the volume of the water in the tank,

$$\text{KE}_{\text{tank}} = \frac{\rho v^2}{2} Ah = \frac{\rho V^2 a^2}{2} h, \quad (4)$$

$$\frac{d\text{KE}_{\text{tank}}}{dt} = \frac{\rho V^2 a^2}{2} \frac{dh}{dt} + \rho V \frac{dV}{dt} \frac{a^2}{A} h = -\frac{\rho V^3 a^3}{2 A^2} + \rho V \frac{dV}{dt} \frac{a^2}{A} h, \quad (5)$$

using eq. (2) to obtain the last form of eq. (5).

The rate at which kinetic energy exits the tank, with velocity V , is given by,

$$\frac{d\text{KE}_{\text{exit}}}{dt} = \frac{dm_{\text{exit}}}{dt} \frac{V^2}{2} = \rho V a \frac{V^2}{2}. \quad (6)$$

Conservation of energy now implies that,

$$\frac{dW}{dt} = \rho g V a h = \frac{d\text{KE}_{\text{tank}}}{dt} + \frac{d\text{KE}_{\text{exit}}}{dt} = -\frac{\rho V^3 a^3}{2 A^2} + \rho V \frac{dV}{dt} \frac{a^2}{A} h + \rho V a \frac{V^2}{2}. \quad (7)$$

If we divide eq. (7) by $\rho V a$, we obtain, noting from eq. (2) that $V = -A\dot{h}/a$, $\dot{V} = -A\ddot{h}/a$,

$$gh = \left(1 - \frac{a^2}{A^2}\right) \frac{V^2}{2} + \frac{a}{A} h \frac{dV}{dt} = \frac{\dot{h}^2}{2} \left(\frac{A^2}{a^2} - 1\right) - h\ddot{h}. \quad (8)$$

Time t can be replaced as the independent variable in this equation by the depth h , by combining the first form of eq. (8) with eq. (2) to yield,²

$$\frac{dV}{dt} = \frac{dV}{dh} \frac{dh}{dt} = -\frac{a}{A} V \frac{dV}{dh} = -\frac{1}{2} \frac{a}{A} \frac{dV^2}{dh}, \quad (9)$$

$$2gh = \left(1 - \frac{a^2}{A^2}\right) V^2 - \frac{a^2}{A^2} h \frac{dV^2}{dh}. \quad (10)$$

Equation (10) tells us that the velocity V of the effluent stream from the tank is a function of the area ratio a/A , the water depth h , and the initial conditions $v_0 = 0 = V_0$ at time

²The last term in eq. (10) involves the derivative of V^2 with respect to h , which term captures the effect of the fluid acceleration in the tank that is omitted in the steady-flow version of the Bernoulli equation.

Equation (10) is consistent with the so-called extended Bernoulli equation presented in Appendix A.


$t = 0$, when depth of the (inviscid) water in the tank is h_0 . The solution to this equation, subject to these initial conditions, is given by,³

$$V(h) = \sqrt{2gh \frac{1 - (h/h_0)^{\frac{1-2r}{r}}}{1-2r}} = \sqrt{2gh_0} \sqrt{\frac{h}{h_0} \frac{1 - (h/h_0)^{\frac{1-2r}{r}}}{1-2r}} \quad (0 \leq h \leq h_0), \quad (16)$$

where $r = (a/A)^2$. For the limiting cases in which $r = 0$ or 1, this solution reduces to,

$$V(h, r = 0) = \sqrt{2gh}, \quad V(h, r = 1) = \sqrt{2g(h_0 - h)}. \quad (17)$$

For the case of $r = 1$ (*i.e.*, the case in which the exit-hole area is equal to the tank area), the above equation for the efflux velocity V is, as expected, just that predicted for free fall.

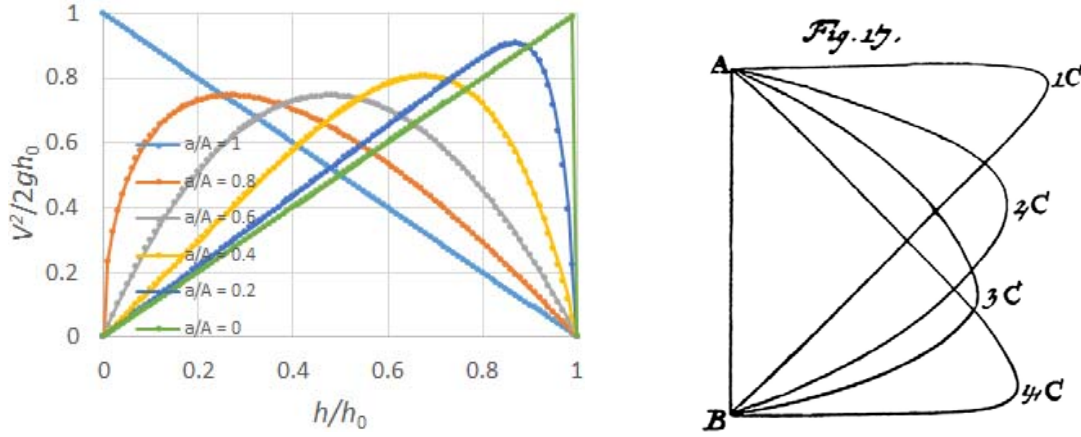

Results from eq. (16) for the efflux V^2 , normalized by $2gh_0$, as a function of the (dimensionless) fluid-depth ratio h/h_0 and the (dimensionless) area ratio a/A are shown in the

³We follow, for example, https://en.wikipedia.org/wiki/Linear_differential_equation, in the section on *First-order equation with variable coefficients*, and write eq. (10) as,

$$\frac{dV^2}{dh} = V^2 \frac{1-r}{hr} - \frac{2g}{r}, \quad (11)$$

with $r = a^2/A^2$. The solution is,

$$V^2 = e^F \left(C - \frac{2g}{r} \int e^{-F} dh \right), \quad (12)$$

where C is a constant and,

$$F = \int \frac{1-r}{hr} dh = \frac{1-r}{r} \ln h, \quad e^F = h^{\frac{1}{r}-1}, \quad \int e^{-F} dh = \int h^{1-\frac{1}{r}} dh = \frac{r}{2r-1} h^{2-\frac{1}{r}}. \quad (13)$$

Hence,

$$V^2 = h^{\frac{1}{r}-1} \left(C + \frac{2g}{1-2r} h^{2-\frac{1}{r}} \right) = \left(Ch^{\frac{1}{r}-1} + \frac{2gh}{1-2r} \right) = \left(Chh^{\frac{1}{r}-2} + \frac{2gh}{1-2r} \right). \quad (14)$$

Since $V^2 = 0$ when $h = h_0$, $C = -2gh_0^{2-\frac{1}{r}}/(1-2r)$, and finally,

$$V^2 = \frac{2gh}{1-2r} \left(1 - (h/h_0)^{\frac{1-2r}{r}} \right). \quad (15)$$

figure on the left of the previous page (note that time increases from right to left in the figure).⁴

In all cases, the efflux velocity V is equal to zero initially (*i.e.*, when $h = h_0$), and then rises rapidly as the fluid, both inside the tank and in the efflux, accelerates. However, as the depth h of fluid in the tank decreases, the efflux velocity V passes through a maximum and decreases thereafter. Eventually, as the fluid depth h approaches zero, the efflux velocity V , of course, also drops to zero. In the case of $a/A = 1$, the maximum velocity is attained just as the tank reaches empty.⁵


1.1 Draining a Tank through a Small Hole

For a small hole, $a \ll A$, the acceleration \ddot{h} can be neglected in eq. (8), which can then be written as,

$$\frac{\dot{h}}{\sqrt{h}} = -\sqrt{\frac{2g}{A^2/a^2 - 1}}, \quad \sqrt{h} = \sqrt{h_0} - \sqrt{\frac{g}{2(A^2/a^2 - 1)}}t, \quad (20)$$

⁴The figure on the right is from [2], with horizontal axis V^2 and vertical axis $h_0 - h$. Curve 1 is for a small hole, and curve 4 is for a large one.

⁵It may also be of interest to consider the exit velocity normalized to the instantaneous depth $h(t)$ of fluid in the tank, rather than to the depth h_0 at time zero.

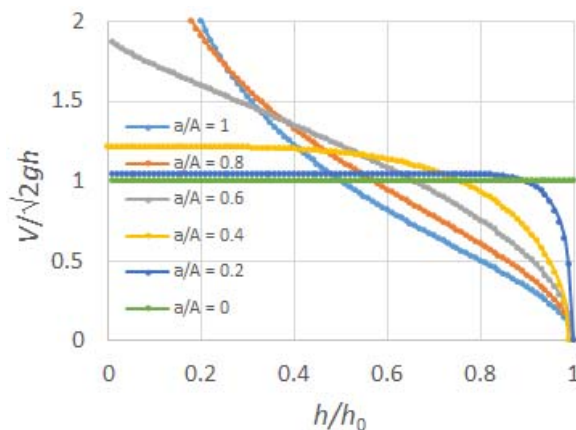

According to the results in the figure, for (small) values of the area ratio a/A less than 0.5, the dimensionless efflux velocity $V/\sqrt{2gh}$ levels off to a constant value as the depth h of fluid in the tank decreases. The smaller the value of a/A , the more rapidly the dimensionless velocity levels off. From our analytic solution, eq. (16), the value to which $V/\sqrt{2gh}$ levels off is given by,

$$\frac{V(h \rightarrow 0)}{\sqrt{2gh}} = \sqrt{\frac{1}{1 - 2(a/A)^2}}. \quad (18)$$

For the case of $a/A = 0.2$, for example, we see from the figure above that, once the depth h has decreased to about 80% of the initial depth h_0 , the velocity has already leveled off.

For small values of a/A , eq. (18) can be expressed, to order $r = (a/A)^2$ by,

$$\frac{V(h \rightarrow 0; r \ll 1)}{\sqrt{2gh}} \approx 1 + \frac{a^2}{A^2}. \quad (19)$$

noting that \dot{h} is negative. The time t_d for the tank to drain (to $h = 0$) is,

$$t_d = \sqrt{\frac{2h_0}{g}} \sqrt{\frac{A^2}{a^2} - 1} \approx \sqrt{\frac{2h_0}{g}} \frac{A}{a}. \quad (21)$$

Many quantitative experimental studies of the draining of a tank exist, including [4]-[23]. Only two experiments [14, 15] report good agreement with eq. (21),⁶ while it is more typically found that the tank drains roughly 1.4 times more slowly. This is partly attributable to energy dissipation by viscous effects [6], which we ignore in this note. Also, the tank never actually drains completely but ends with a water level Δh above the outlet, as surface tension exerts a small force to keep water in the tank [18, 23]; this effect can be accommodated by replacing h_0 with $h_0 - \Delta h$ in eq. (21).

Even for liquid with very low viscosity and low surface tension, the empirical evidence [11, 12, 16, 20] is that drainage time is better represented as,

$$t_d \approx \sqrt{\frac{2h_0}{g}} \frac{A}{C_d a}, \quad (22)$$

where the so-called coefficient of discharge C_d is roughly 1/2.

This is related to a comment by Borda (1766) [24] that if one supposes the water at the small hole to be at atmospheric pressure, there is a conflict between the energy analysis of Bernoulli and a momentum analysis, in which the velocity V should be smaller by a factor of $\sqrt{2}$ than that found in the energy analysis.⁷ Borda argued that this difficulty is resolved by the *vena contracta*, the reduction in the area of the water jet to $a' \approx 0.64 a$ (apparently first observed by Torricelli), with the implication that the velocity (and momentum) of the water at the hole is roughly $1/\sqrt{2}$ that a short distance away from the hole.

Stated another way, the velocity $V = \sqrt{2gh}$ found by the energy analysis for a small hole applies not at the hole itself, but at a distance roughly one diameter $\sqrt{a/\pi}$ away from the hole,⁸ and is valid for predicting the trajectory of the efflux when the hole is in the vertical wall of the tank. However, if one wishes to emphasize the flow rate, then the energy argument must be corrected for the *vena contracta*, while a momentum analysis can be used without mention of it (although the momentum argument must be corrected for the *vena contracta* to describe the trajectory of an efflux whose initial velocity is horizontal).

⁶In [14], the tank was a right circular cylinder and the drain was a tube of length larger than its diameter. In [15], the tank was an inverted 2-liter soda bottle (whose shape tapers towards the cap) with a 7.2-mm-diameter hole in its cap. It seems that these variants on the nominal case of a right-circular-cylinder tank with a sharp-edged hole happened to compensate for the “corrections” that apply to the nominal case.

⁷For a review of this argument, see [25].

⁸This result was stated by Newton on p. 333 of [26], following an argument in which part of the water in the tank could be ice.

A Appendix: Use of the Extended Bernoulli Equation

The nominal form of Bernoulli's equation is for steady, incompressible, inviscid fluid flow in an inertial frame of reference, relating the fluid pressure P and velocity \mathbf{u} at two points along a streamline via conservation of energy,

$$P_1 + \frac{\rho u_1^2}{2} + \rho g h_1 = P_2 + \frac{\rho u_2^2}{2} + \rho g h_2 \quad (\text{steady Bernoulli}), \quad (23)$$

where h is the height of a point in a gravitational field with acceleration g . Bernoulli's equation can be extended to the case of nonsteady, compressible, rotational, elasto-viscoplastic flow in a noninertial reference frame by the addition of a "correction" term obtained by an appropriate integration along the streamline,

$$P_1 + \frac{\rho u_1^2}{2} + \rho g h_1 = P_2 + \frac{\rho u_2^2}{2} + \rho g h_2 + \int_1^2 \text{"correction"}, \quad (\text{extended Bernoulli}), \quad (24)$$

where the (complicated) "correction" term is displayed in eq. (12) of [27].

In the present example of unsteady, but incompressible flow, in an inertial frame where rotation of the fluid is neglected, only a single "correction" applies,⁹

$$P_1 + \frac{\rho u_1^2}{2} + \rho g h_1 = P_2 + \frac{\rho u_2^2}{2} + \rho g h_2 + \int_1^2 \rho \frac{\partial \mathbf{u}}{\partial t} \cdot d\mathbf{l}, \quad (25)$$

where we make the approximation that $\mathbf{u}(\mathbf{r}, t) = \dot{h} \hat{\mathbf{z}}$, with the z -axis vertical and upwards, is the unsteady velocity of the fluid in the system (which ignores the small horizontal velocity of the water inside the tank). Taking point 1 at the center of the upper surface of the water in the tank ($z = h$), and point 2 at the center of the hole at the bottom of the tank ($z = 0$), we ignore the tiny difference in atmospheric pressure between these points, and note that $u_1 = \dot{h} = -aV/A$, $u_2 = -V$, and,

$$\int_1^2 \rho \frac{\partial \mathbf{u}}{\partial t} \cdot d\mathbf{l} = \rho \int_h^0 \frac{d^2 h}{dt^2} dz = -\rho h \frac{d^2 h}{dt^2} = \rho \frac{a}{A} h \frac{dV}{dt}. \quad (26)$$

Then, eq. (25) becomes, after dividing by ρ ,

$$gh = \left(1 - \frac{a^2}{A^2}\right) \frac{V^2}{2} + \frac{a}{A} h \frac{dV}{dt}. \quad (27)$$


as previously found in eq. (8). As remarked after eq. (10) above, the "correction" term in the extended Bernoulli equation is the last term of eq. (27), which is negligible for a small hole in the tank is small, $a/A \ll 1$, in which case $V^2 \approx 2gh$, as first found by Torricelli [1], and argued in most textbooks on the basis of the (steady) Bernoulli equation (23).

⁹This relatively simple form of the extended/unsteady Bernoulli equation is deduced from Euler's equation in [28].

A.1 Another Example (Jan. 8, 2022)

We review the example in [28], which discussion contains some typos.¹⁰

A tank of area A_1 perpendicular to the vertical contains (incompressible) water of density ρ . An aperture of area $A_2 \ll A_1$ at depth h below the initial water level in the tank is connected to a horizontal pipe of length L (and area A_2) whose far end is open to the air. The aperture A_2 is initially closed, but is opened at time $t = 0$.

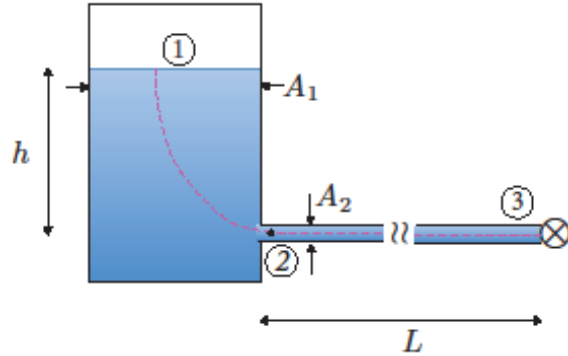

The unsteady Bernoulli equation (25) relating points 1 (at $h_1 = h$ and $u_1 \approx 0$) and 3 (at $h_3 = 0$, $u_3 = V$ and $P_3 \approx P_1$) is,


$$P_1 + \frac{\rho u_1^2}{2} + \rho g h_1 = P_3 + \frac{\rho u_3^2}{2} + \rho g h_3 + \int_1^2 \rho \frac{\partial \mathbf{u}}{\partial t} \cdot d\mathbf{l} + \int_2^3 \rho \frac{\partial \mathbf{u}}{\partial t} \cdot d\mathbf{l}. \quad (28)$$

For $A_2 \ll A_1$ the velocity of the water in the tank along path 1-2 is small compared to the (mean) velocity V of the water in the horizontal exit pipe, which velocity is constant along that pipe (in the approximation of incompressible water). Hence, eq. (28) simplifies to,

$$gh \approx \frac{V^2}{2} + L \frac{dV}{dt}, \quad \frac{dV}{2gh - V^2} \approx \frac{dt}{2L}, \quad \frac{1}{\sqrt{2gh}} \tanh^{-1} \frac{V}{\sqrt{2gh}} \approx \frac{t}{2L}, \quad (29)$$

using Dwight 140.02 [29], noting that V starts from zero at time $t = 0$ and increases to the steady-state value $\sqrt{2gh}$. Finally,

$$\frac{V}{\sqrt{2gh}} \approx \tanh \frac{t}{\tau}, \quad \text{where} \quad \tau = \frac{2L}{\sqrt{2gh}}. \quad (30)$$

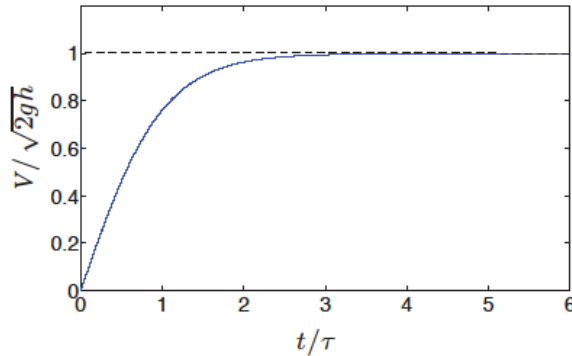

The exit velocity V takes on the steady-state value $\sqrt{2gh}$ very quickly for a short pipe.

¹⁰Thanks to Vedat Batu for pointing this out.

B Appendix: A Lagrangian Approach

A Lagrangian approach to variable-mass problems has been given in [30, 31].

For the present example, it seems appropriate to consider the system to be only the water still in the tank, which can be characterized by a single coordinate $q = h$. The velocity V of the efflux of water from the tank is related by the continuity equation for incompressible fluids, as in eq. (1) above,

$$V = \frac{av}{A} = -\frac{a\dot{h}}{A}. \quad (31)$$

The kinetic energy of the system is,

$$T = \frac{\rho Ah\dot{h}^2}{2}. \quad (32)$$

While one can give an expression for the gravitational potential energy of this system, the force on the system is not simply related to this potential energy, so the latter is not used in the method of [30]. Rather, one uses a generalized force, Q_h as was introduced by Lagrange.

We recall that for a system with a set of coordinates q_k (which could be functions of time t) and kinetic energy $T(q_k, \dot{q}_k, t)$, Lagrange's equations can be written as,¹¹

$$\frac{d}{dt} \frac{\partial T}{\partial \dot{q}_k} - \frac{\partial T}{\partial q_k} = Q_k = \sum_i \mathbf{F}_i^{\text{ext}} \cdot \frac{\partial \mathbf{r}_i}{\partial q_k} = \sum_i \mathbf{F}_i^{\text{ext}} \cdot \frac{\partial \dot{\mathbf{r}}_i}{\partial \dot{q}_k} \quad (33)$$

where \mathbf{r}_i is the (x, y, z) coordinate of the i^{th} particle in the system, and $\mathbf{F}_i^{\text{ext}}$ is the external force on particle i .¹² The forms for the generalized force given in eq. (33) follow from arguments by d'Alembert [33]. If the external forces are deducible from potentials, $\mathbf{F}_i = -\partial V_i / \partial \mathbf{r}_i$, then the first form of eq. (24) simplifies to,

$$Q_k = -\frac{\partial V}{\partial q_k}, \quad (34)$$

where $V = \sum_i V_i$.

In a variable-mass problem such as the present example, the flow of water out of the hole in tank is associated with a reaction force on the water still in the tank. In the Newtonian approach, this reaction force must be included in the equation(s) of motion, but in Lagrangian approach the reaction force is not considered to be an external force, and so is not to be included in the generalized forces.

In the present example, a water molecule i has position (x_i, y_i, z_i) that does not depend directly on h , so the generalized force would be $Q_h = 0$ according to the first form of eq. (33). The velocity of a water molecule is, to a good approximation $(0, 0, \dot{h})$, and the external force

¹¹See, for example, p. 41 of [32]. The fact that $\partial \mathbf{r}_i / \partial q_k = \partial \dot{\mathbf{r}}_i / \partial \dot{q}_k$ is deduced on p. 40 of [32].

¹²We recall that Lagrange's method distinguishes between external and constraint forces. In the present example, the upward normal force on the bottom of the tank, which holds it at rest, is a constraint force, and so is not included in the computation of the generalized force.

on this molecule is $\mathbf{F}^{\text{ext}} = -m_{\text{mol}} g \hat{\mathbf{z}}$, so the generalized force Q_h according to the second form of eq. (33) is given by,

$$Q_h = - \sum_i m_{\text{mol},i} g \hat{\mathbf{z}} \cdot \frac{\partial \dot{\mathbf{r}}_i}{\partial \dot{h}} = - \sum_i m_{\text{mol},i} g \hat{\mathbf{z}} \cdot \hat{\mathbf{z}} = -mg = -\rho Agh. \quad (35)$$

The potential energy of the water in the tank is $V = \rho Ah^2 g/2$ with respect to the bottom of the tank, so according to eq. (34), the generalized force is $Q_h = -\rho Ahg = -mg$ as in eq(35). Since taking $Q_h = 0$ would lead to no dependence of the motion on g , we accept that the generalized force is given by eq. (35).¹³

In the method of [30, 31], the left side of eq. (33) is modified for a variable-mass system, whose (control) volume has velocity \mathbf{w} , according to eq. (5.6) of [30] and eq. (1) of [31],¹⁴

$$\frac{d}{dt} \frac{\partial T_w}{\partial \dot{q}_k} - \frac{\partial T_w}{\partial q_k} + \int \frac{\partial \tilde{T}}{\partial \dot{q}_k} (\mathbf{v} - \mathbf{w}) \cdot d\mathbf{Area} - \int \tilde{T} \frac{\partial (\mathbf{v} - \mathbf{w})}{\partial \dot{q}_k} \cdot d\mathbf{Area} = Q_k, \quad (36)$$

where T_w is the kinetic energy within the control volume, \tilde{T} is the kinetic energy per unit volume, and \mathbf{v} is the velocity of the material at a point in the system.

In the present example, the control volume is the bucket and water therein, $\mathbf{w} = 0$, $\mathbf{v} = \dot{h} \hat{\mathbf{z}}$ and $\tilde{T} = \rho \dot{h}^2/2$ in the interior of the system, but on its surface \mathbf{v} and \tilde{T} are zero except at the hole, where $\mathbf{v} = -V \hat{\mathbf{z}} = A \dot{h} \hat{\mathbf{z}}/a$ and $\tilde{T} = \rho V^2/2 = \rho \dot{h}^2 A^2/2a^2$. Then, from eq. (32),

$$\frac{d}{dt} \frac{\partial T_w}{\partial \dot{h}} = \rho A h \ddot{h} + \rho A \dot{h}^2, \quad \frac{\partial T_w}{\partial h} = \frac{\rho A \dot{h}^2}{2}, \quad (37)$$

and at the hole, where the area vector is direction outwards with $d\mathbf{Area} = -a \hat{\mathbf{z}}$,

$$\tilde{T} = \rho \dot{h}^2 \frac{A^2}{2a^2}, \quad \frac{\partial \tilde{T}}{\partial \dot{h}} = \rho \dot{h} \frac{A^2}{a^2}, \quad \mathbf{v} = \frac{A}{a} \dot{h} \hat{\mathbf{z}}, \quad \frac{\partial \mathbf{v}}{\partial \dot{h}} = \frac{A}{a} \hat{\mathbf{z}}, \quad \mathbf{w} = 0 = \frac{\partial \mathbf{w}}{\partial \dot{h}}. \quad (38)$$

Hence, the equation of motion (36) for the coordinate h is,

$$\rho A h \ddot{h} + \rho A \dot{h}^2 - \frac{\rho A \dot{h}^2}{2} - \rho \frac{A^3}{a^2} \dot{h}^2 + \frac{\rho A^3 \dot{h}^2}{2a^2} = -\rho Agh, \quad (39)$$

$$h \ddot{h} - \left(\frac{A^2}{a^2} - 1 \right) \frac{\dot{h}^2}{2} = -gh, \quad (40)$$

as previously found in eq. (8). If we make the substitutions $\dot{h} = -(a/A)V$ and $\ddot{h} = -(a/A)dV/dt$, we arrive at,

$$\frac{a}{A} h \frac{dV}{dt} + \left(1 - \frac{a^2}{A^2} \right) \frac{V^2}{2} = gh, \quad (41)$$

¹³It appears that when eq. (34) it applicable, it should be used. For an example where use of either form of eq. (33) leads to zero generalized force, in contrast to use of eq. (34), see sec. 2.4 of [35].

¹⁴An earlier discussion of Lagrange's equations for systems of variable mass was given in [34] (1947), where the context was rocket motion. It was noted that although the system of rocket plus fuel has variable mass, the center of mass of this system remains constant to a reasonable approximation, relative to the system, which permits a simpler form of the equations of motion than eq. (36).

as previously found in eqs. (8) and (27).

While the approach of [30, 31] leads to a reasonable analysis of the present problem, it seems that there is no single Lagrangian approach that applies to all variable-mass problems.¹⁵ However, other ‘‘Lagrangian’’ approaches have been discussed.

B.1 Another Variant of the Lagrangian Approach

A recent paper [36] presents a Lagrangian approach close to the above, but with a slightly different notation, and traces this approach to an early paper on variable-mass systems by Cayley [37] (1857).

The equations of motion are written in [36] in the form,

$$\frac{d}{dt} \frac{\partial S}{\partial \dot{q}_k} - \frac{\partial S}{\partial q_k} + \frac{\partial \sigma}{\partial \dot{q}_k} = Q_k, \quad (43)$$

where S is the same as the kinetic energy of the system called T previously, $\sigma = \dot{m}_e V^2/2$ describes the rate of kinetic energy ejected from the system (at velocity V), the partial derivative operations $\partial/\partial q_k$ and $\partial/\partial \dot{q}_k$ on $f(m, q_k, \dot{q}_k, t)$ act only on the dependence of f on q_k and \dot{q}_k (and not on the dependence on mass m), and Q_k is the generalized (external) force associated with coordinate k .

For the present example of the leaky tank, with only a single coordinate h ,

$$S = \frac{m\dot{h}^2}{2} = \frac{\rho Ah\dot{h}^2}{2} = T, \quad m = \rho Ah, \quad \sigma = \frac{\dot{m}_e V^2}{2} = \frac{\dot{m}_e \dot{h}^2 A^2}{2a^2}, \quad \dot{m}_e = \rho aV = -\rho A\dot{h}, \quad (44)$$

with the convention that $\dot{m}_e > 0$ when mass is ejected from the system. As before, the generalized force is,

$$Q_h = -mg = -\rho Agh. \quad (45)$$

The equation of motion according to eq. (43) is then,

$$\frac{d}{dt} m\dot{h} - 0 + \dot{m}_e \dot{h} \frac{A^2}{a^2} = \rho Ah\ddot{h} + \rho A\dot{h}^2 - \rho A\dot{h}^2 \frac{A^2}{a^2} = -\rho Agh, \quad (46)$$

$$h\ddot{h} + \dot{h}^2 \left(1 - \frac{A^2}{a^2}\right) = -gh, \quad (47)$$

$$\frac{a}{A} h \frac{dV}{dt} + \left(1 - \frac{a^2}{A^2}\right) V^2 = gh, \quad (48)$$

¹⁵An example where the method of [30, 31] fails has been pointed out by the author of [36]. A snowball slides on snow-covered ice, subject to no external force, and accumulates mass at rate $\dot{m} = kv$, *i.e.*, $m(t) = m_0 + kx$. Conservation of horizontal momentum implies that $m(t)v(t) = m(t+dt)v(t+dt) = (m + kv dt)(v + \dot{v} dt) \approx m(t)v(t) + (m\dot{v} + kv^2) dt$, such that the equation of motion is $m\dot{v} = -kv^2$.

Taking the control volume to be the moving mass, with coordinate $q = x$ and $\dot{q} = v$, the velocity of the control volumes is $\mathbf{w} = \mathbf{v}$, the generalized force Q is zero, and the kinetic energy of the control volume is $T_w = m(t)v^2/2$. Then, the equation of motion according to eq. (36) would be just

$$\frac{d}{dt} \frac{\partial T_w}{\partial \dot{v}} = m\dot{v} + kv^2 = \frac{\partial T_w}{\partial x} = \frac{kv^2}{2}, \quad m\dot{v} = -\frac{kv^2}{2}, \quad (42)$$

in disagreement with the momentum analysis.

The second terms in eqs. (47)-(48) are a factor of 2 larger than that found in eqs. (8), (27) and (40), and implies that $V^2 = gh$ rather than $2gh$ as in the energy analysis. That is, application of eq. (43) to the present example seems to lead to the result of an momentum analysis, rather than an energy analysis. If one then considers the *vena contracta* at the outlet, which increase the velocity of the efflux by $\approx \sqrt{2}$ over a short distance, agreement with the energy analysis is obtained.

The limitations of the method of [36] are illustrated, for example, by the uncoiling of a tape [35], including the variant in sec. V.D of [36] which we consider to be misanalyzed there.

B.2 Yet Another Variant of a Lagrangian Approach

Yet another Lagrangian approach is given in [38] for systems in which the variable mass depends on position, as is the case of the present example if we take the system to be the mass $m = \rho Ah$ of water in the leaky bucket.

According to eq. (19) of [38] the equation(s) of motion of the system can be written as,

$$\frac{d}{dt} \frac{\partial T}{\partial \dot{q}_k} - \frac{\partial T}{\partial q_k} = \hat{Q}_k = \sum_i \left\{ (\mathbf{f}_i + \dot{m}_i \mathbf{w}_i) \cdot \frac{\partial \mathbf{r}_i}{\partial q_k} + \frac{1}{2} \frac{d}{dt} \left(\frac{\partial m_i}{\partial \dot{q}_k} \mathbf{v}_i^2 \right) - \frac{1}{2} \frac{\partial m_i}{\partial q_k} \mathbf{v}_i^2 \right\}, \quad (49)$$

where T is the kinetic energy of the system, whose particles at positions \mathbf{r}_i have masses $m_i(q_k, \dot{q}_k, t)$, velocities \mathbf{v}_i , \mathbf{f}_i is the “active” force on particle i , and $\dot{m}_i \mathbf{w}_i$ is a “nonconservative force, proportional to the rate of variation of mass with respect to time and to the velocity of the expelled (or gained) mass”.¹⁶

In the present example with a single coordinate h , $T = \rho Ah \dot{h}^2 / 2$ as before, the first term of \hat{Q}_h is the generalized force $Q_h = -\rho Agh$, the velocity of all particles in the system is $\mathbf{v}_i = \dot{h} \hat{\mathbf{z}}$, and $\sum_i m_i = \rho Ah$. Possibly,

$$\sum_i \dot{m}_i \mathbf{w}_i \cdot \frac{\partial \mathbf{r}_i}{\partial h} = \rho A \dot{h} (-V \hat{\mathbf{z}}) \cdot \hat{\mathbf{z}} = -\rho A \dot{h} V = -\frac{\rho A^2 \dot{h}^2}{a}. \quad (50)$$

If so, the equation of motion according to eq. (49) would be,

$$\rho A h \ddot{h} + \rho A \dot{h}^2 - \frac{\rho A \dot{h}^2}{2} = -\rho A g h - \frac{\rho A^2 \dot{h}^2}{a} + 0 - \frac{\rho A \dot{h}^2}{2} \quad (51)$$

$$h \ddot{h} + \dot{h}^2 \left(1 + \frac{A}{a} \right) = -gh. \quad (52)$$

Or, if we ignore the term in $\dot{m}_i \mathbf{w}_i$, the equation of motion would be,

$$h \ddot{h} + \dot{h}^2 = -gh. \quad (53)$$

??? However, neither eq. (52) nor (53) agree with the equation of motion found previously in eqs. (8) and (40)??

¹⁶The meaning of this phrase is unclear to the authors.

C Appendix: The Leaky Tank is Also Being Filled

(Mar. 30, 2022)

Suppose the leaky tank is also being filled at a constant rate, such that in the absence of a leak the height/depth h of the water in the tank rose at rate $\dot{h} = u$.

We ignore the effects of the pressure generated by the water falling onto the upper surface of the water tank, and of the increase in the temperature of the water in the tank due to the energy of the falling water that is dissipated in the tank. Then, eq. (1) still holds, with $v = aV/A$ as the vertical velocity of the water in the tank, where again V is the velocity of the water at the exit hole of area a and A is the horizontal area of the tank. However, eq. (2) is now,

$$\dot{h} = u - v = u - \frac{aV}{A}, \quad V = \frac{A}{a}(u - \dot{h}), \quad \dot{V} = -\frac{A\ddot{h}}{a}. \quad (54)$$

As before, the rate dW/dt of gravitational work on the water in the tank at time t is the product of the rate ρgv of gravitational work per unit volume, and the volume Ah of the water in the tank,

$$\frac{dW}{dt} = \rho gvAh = \rho gVah, \quad (55)$$

where ρ is the mass density of the water.

The total kinetic energy of the water in the tank is the product of the kinetic energy per unit volume $\rho v^2/2$ and by the volume of the water in the tank,

$$\text{KE}_{\text{tank}} = \frac{\rho v^2}{2}Ah = \frac{\rho V^2 a^2}{2A}h, \quad (56)$$

$$\frac{d\text{KE}_{\text{tank}}}{dt} = \frac{\rho V^2 a^2}{2A} \frac{dh}{dt} + \rho V \frac{dV}{dt} \frac{a^2}{A}h = \frac{\rho V^2 a^2 u}{2A} - \frac{\rho V^3 a^3}{2A^2} + \rho V \frac{dV}{dt} \frac{a^2}{A}h, \quad (57)$$

using eq. (54) to obtain the last form of eq. (57).

The rate at which kinetic energy exits the tank, with velocity V , is given by,

$$\frac{d\text{KE}_{\text{exit}}}{dt} = \frac{dm_{\text{exit}}}{dt} \frac{V^2}{2} = \rho Va \frac{V^2}{2}. \quad (58)$$

Conservation of energy now implies that,

$$\frac{dW}{dt} = \rho gVah = \frac{d\text{KE}_{\text{tank}}}{dt} + \frac{d\text{KE}_{\text{exit}}}{dt} = \frac{\rho V^2 a^2 u}{2A} - \frac{\rho V^3 a^3}{2A^2} + \rho V \frac{dV}{dt} \frac{a^2}{A}h + \rho Va \frac{V^2}{2}. \quad (59)$$

If we divide eq. (59) by ρVa , we obtain, recalling eq. (54),

$$gh = \frac{Vau}{2A} + \left(1 - \frac{a^2}{A^2}\right) \frac{V^2}{2} + \frac{a}{A}h \frac{dV}{dt} = \frac{u(u - \dot{h})}{2} + \frac{(u - \dot{h})^2}{2} \left(\frac{A^2}{a^2} - 1\right) - h\ddot{h}. \quad (60)$$

Time t can be replaced as the independent variable in this equation by the depth h , by combining the first form of eq. (60) with eq. (54) to yield,

$$\frac{dV}{dt} = \frac{dV}{dh} \frac{dh}{dt} = \left(u - \frac{a}{A}V\right) \frac{dV}{dh} = u \frac{dV}{dh} - \frac{1}{2} \frac{a}{A} \frac{dV^2}{dh}, \quad (61)$$

$$2gh = \frac{Vau}{A} + \left(1 - \frac{a^2}{A^2}\right)V^2 + 2hu \frac{dV}{dh} - \frac{a^2}{A^2} h \frac{dV^2}{dh}. \quad (62)$$

It seems difficult to integrate either eq. (60) or (62) analytically. Of course, there is the special case that $u = v = aV/A$ such that $\dot{h} = 0$ and $V^2 = 2gh$ is constant in time (even for $a = A$). And, for very small holes we have $V^2 \approx 2gh \approx 2g(h_0 + ut)$.

References

- [1] E. Torricelli, *Opera Geometrica* (Florence, 1644),
http://kirkmcd.princeton.edu/examples/mechanics/torricelli_opera_44.pdf
http://kirkmcd.princeton.edu/examples/mechanics/torricelli_opera_p191.pdf
- [2] D. Bernoulli, *Hydrodynamica* (Strassburg, Austria, 1738),
http://kirkmcd.princeton.edu/examples/fluids/bernoulli_hydrodynamica_38.pdf
Hydrodynamics by Daniel Bernoulli and Hydraulics by Johann Bernoulli, trans. by T. Carmody and H. Kobus (Dover, 1968),
http://kirkmcd.princeton.edu/examples/fluids/bernoulli_ch3_13.pdf
- [3] A. Malcherek, *History of the Torricelli Principle and a New Outflow Theory*, J. Hydraul. Eng. **142**, 02516004 (2016),
http://kirkmcd.princeton.edu/examples/fluids/malcherek_jhe_142_02516004_16.pdf
- [4] J. Boussinesq, *Essai sur la théorie de l'écoulement dun liquide par un orifice en mince paroi*, Compt. Rend. Acad. Sci. **70**, 33, 177, 1279 (1870),
http://kirkmcd.princeton.edu/examples/fluids/boussinesq_cras_70_33_70.pdf
- [5] H. Judd and R.S. King, *Some Experiments on the Frictionless Orifice*, Eng. News. **56**, 326 (1906), http://kirkmcd.princeton.edu/examples/fluids/judd_en_56_326_06.pdf
- [6] G.F. Davidson, *Experiments on the Flow of Viscous Fluids through Orifices*, Proc. Roy. Soc. London A **89**, 91 (1913),
http://kirkmcd.princeton.edu/examples/fluids/davidson_prsla_89_91_13.pdf
- [7] H. Bouasse, *Jets, Tubes et Canaux* (Librairie Delagrave, Paris, 1923),
http://kirkmcd.princeton.edu/examples/fluids/bouasse_jets_23.pdf
- [8] G.L. Tuve and R.E. Sprenkle, *Orifice Discharge Coefficients for Viscous Liquids*, Instruments **6**, 201 (1933), http://kirkmcd.princeton.edu/examples/fluids/tuve_instr_6_201_33.pdf
- [9] F.W. Medaugh and G.D. Johnson, *Investigation of the Discharge and Coefficients of Small Circular Orifices*, Civil Eng. **10**, 422 (1940),
http://kirkmcd.princeton.edu/examples/fluids/medaugh_ce_10_422_30.pdf

- [10] J.H. Lienhard (V) and J.H. Lienhard (IV), *Velocity Coefficients for Free Jets from Sharp-Edged Orifices*, J. Fluids Eng. **106**, 13 (1984),
http://kirkmcd.princeton.edu/examples/fluids/lienhard_jfe_01_13_84.pdf
- [11] C. Clanet, *Clepsydrae, from Galilei to Torricelli*, Phys. Fluids **12**, 2743 (2000),
http://kirkmcd.princeton.edu/examples/fluids/clanet_pf_12_2743_00.pdf
- [12] P.M.C. de Oliveira *et al.*, *Pin-hole water flow from cylindrical bottles*, Phys. Ed. **38**, 110 (2000), http://kirkmcd.princeton.edu/examples/fluids/oliveira_pe_38_110_00.pdf
- [13] H. Chanson, S.-I. Aoki and M. Maruyama, *Unsteady two-dimensional orifice flow: a large-size experimental investigation*, J. Hydr. Res. **40**, 63 (2002),
http://kirkmcd.princeton.edu/examples/fluids/mihar_jhr_40_63_02.pdf
- [14] J.N. Libii, *Mechanics of the slow draining of a large tank under gravity*, Am. J. Phys. **71**, 1204 (2003), http://kirkmcd.princeton.edu/examples/fluids/libii_ajp_71_1204_03.pdf
- [15] D. Guerra, A. Plaisted and M. Smith, *A Bernoulli's Law Lab in a Bottle*, Phys. Teach. **43**, 456 (2005), http://kirkmcd.princeton.edu/examples/fluids/guerra_pt_43_456_05.pdf
- [16] M.E. Saleta, D. Tobia and S. Gil, *Experimental study of Bernoulli's equation with losses*, Am. J. Phys. **73**, 598 (2005),
http://kirkmcd.princeton.edu/examples/fluids/saleta_ajp_73_598_05.pdf
- [17] T.S. Liu *et al.*, *Drainage and filling in cylindrical and rectangular containers*, Proc. Inst. Mech. Eng. D **222**, 565 (2008),
http://kirkmcd.princeton.edu/examples/fluids/liu_pimed_222_565_08.pdf
- [18] P.L.L. Escamilla, *Surface tension influence in vessel discharge*, Am. J. Phys. **77**, 477 (2009), http://kirkmcd.princeton.edu/examples/fluids/escamilla_ajp_77_477_09.pdf
- [19] D. Guerra *et al.*, *An Introduction to Dimensionless Parameters in the Study of Viscous Fluid Flows*, Phys. Teach. **49**, 175 (2011),
http://kirkmcd.princeton.edu/examples/fluids/guerra_pt_49_175_11.pdf
- [20] M. Franchini and L. Lanza, *Use of Torricelli's Equation for Describing Leakages in Pipes of Different Elastic Materials, Diameters and Orifice Shape and Dimensions*, Proc. Eng. **89**, 290 (2014), http://kirkmcd.princeton.edu/examples/fluids/franchini_pe_89_290_14.pdf
- [21] A. Hicks and W. Slaton, *Determining the Coefficient of Discharge for a Draining Container*, Phys. Teach. **52**, 43 (2014),
http://kirkmcd.princeton.edu/examples/fluids/hicks_pt_52_43_14.pdf
- [22] M. Blasone *et al.*, *Discharge time of a cylindrical leaking bucket*, Eur. J. Phys. **36**, 035017 (2015), http://kirkmcd.princeton.edu/examples/fluids/blasone_ejp_36_035017_15.pdf
- [23] J. Ferrand *et al.*, *Wetting Effect on Torricelli's Law*, Phys. Rev. Lett. **117**, 248002 (2016), http://kirkmcd.princeton.edu/examples/fluids/ferrand_prl_117_248002_16.pdf

- [24] J.-C. de Borda, *Sur l'Écoulement des Fluides par les Ouvertures des Vases*, Mém. Acad. Roy. Sci. p. 579 (1766), http://kirkmcd.princeton.edu/examples/fluids/borda_mars_579_66.pdf
- [25] K.T. McDonald, *Vena Contracta* (Feb. 16, 2005), http://kirkmcd.princeton.edu/examples/vena_contracta.pdf
- [26] I. Newton, *Philosophiæ Naturalis Principia Mathematica* (1686), http://kirkmcd.princeton.edu/examples/mechanics/newton_principia.pdf
- [27] S.B. Segletes and W.P. Walters, *A note on the application of the extended Bernoulli equation*, Int. J. Imp. Eng. **27**, 561 (2002), http://kirkmcd.princeton.edu/examples/fluids/segletes_ARL-TR-1895_99.pdf
- [28] B.H. and G.H.N., *Unsteady Bernoulli Equation* (MIT, Fall 2013), https://ocw.mit.edu/courses/mechanical-engineering/2-25-advanced-fluid-mechanics-fall-2013/inviscid-flow-and-bernoulli/MIT2_25F13_Unstea_Bernou.pdf
http://kirkmcd.princeton.edu/examples/fluids/mit_2.25_13_unsteady_bernoulli.pdf
- [29] H.B. Dwight, *Tables of Integrals and Other Mathematical Data*, 4th ed. (Macmillan, 1961), http://kirkmcd.princeton.edu/examples/EM/dwight_57.pdf
- [30] H. Irschik and H.J. Holl, *The equations of Lagrange written for a non-material volume*, Acta Mech. **153**, 231 (2002), http://kirkmcd.princeton.edu/examples/mechanics/irschik_am_153_231_02.pdf
- [31] H. Irschik and H.J. Holl, *Lagrange's equations for open systems, derived via the method of fictitious particles, and written in the Lagrange description of continuum mechanics*, Acta Mech. **226**, 63 (2015), http://kirkmcd.princeton.edu/examples/mechanics/irschik_am_226_63_15.pdf
- [32] K.T. McDonald, *Development of a General Method*, Princeton Physics 205, Lecture 3 (1980), <http://kirkmcd.princeton.edu/examples/Ph205/ph205l3.pdf>
- [33] J.-B. d'Alembert, *Traité de Dynamique* (David, Paris, 1743), http://kirkmcd.princeton.edu/examples/mechanics/dalembert_dynamique.pdf
- [34] D.F. Lawden, *Lagrange's Equations for a System of Variable Mass*, J. Brit. Interplanetary Soc. **8**, 174 (1947), http://kirkmcd.princeton.edu/examples/mechanics/lawden_jbis_8_174_47.pdf
- [35] K.T. McDonald, *Uncoiling on a Horizontal Surface* (June 2, 2018), <http://kirkmcd.princeton.edu/examples/uncoil.pdf>
- [36] J.E. Hurtado, *Analytical Dynamics of Variable-Mass Systems*, J. Guid. Control Dyn. **41**, 701 (2018), http://kirkmcd.princeton.edu/examples/mechanics/hurtado_jgcd_41_701_18.pdf
- [37] A. Cayley, *On a Class of Dynamical Problems*, Proc. Roy. Soc. London **8**, 506 (1857), http://kirkmcd.princeton.edu/examples/mechanics/cayley_prsl_8_506_57.pdf

- [38] C.P. Pesce and L. Casetta, *Systems with mass explicitly dependent on position*, in *Dynamics of Mechanical Systems with Variable Mass*, H. Irschik and A.K. Belyaev, eds. (Springer, 2014), http://kirkmcd.princeton.edu/examples/mechanics/pesce_dynamics_14_ch2.pdf