

Analysis of $\text{CO } ^{60}\beta$ -source data. Data set consists of 1805 time stamped waveforms recorded at 145 GSa/s.

```
In[1]:= SetDirectory["~white/Desktop/4mm^2"];
Drop[FileNames[], 1] // Length;
ntrace = %

Out[3]= 1790

In[4]:= Namelist = Drop[FileNames[], 1];
time = Transpose[Import[Namelist[[1]], "Data"]][[1]];
nbins = Dimensions[time][[1]]

Out[6]= 15986

In[7]:= trange = time[nbins] - time[1];
t[bin_] := time[1] + trange * (bin) / nbins
bint[tvar_] := (tvar - time[1]) * nbins / trange

In[10]:= noisemax = 7500;
Print["Do noise analysis for the first ",
      (t[noisemax] - t[1]) * 10^9, " nanoseconds"]
front = Transpose[Import[Namelist[[1]], "Data"]][[2]];
back = Transpose[Import[Namelist[[1]], "Data"]][[3]];
offset = Mean[Take[front, noisemax]] // EngineeringForm


Do noise analysis for the first 46.8658 nanoseconds

Out[14]//EngineeringForm=
-428.374 × 10-6
```

Front and Back are the 2 APDs which face each other. Front is closest to the $\text{CO } ^{60}$ source. Back triggers the scope. The first 47 nanoseconds are used to extract the baseline correction which is typically ~ -0.5 mV.

Inspect some waveforms


```
In[15]:= GraphicsRow[{ListPlot[Table[Transpose[{Transpose[Import[Namelist[[i]], "Data"]][[1]],
      Transpose[Import[Namelist[[i]], "Data"]][[3]]}], {i, 20}],
      PlotRange → {{-0.000000002, .000000004}, {-0.25, .2}}, Joined → True],
      ListPlot[Table[Transpose[{Transpose[Import[Namelist[[i]], "Data"]][[1]],
      Transpose[Import[Namelist[[i]], "Data"]][[2]]}], {i, 20}],
      PlotRange → {{-0.000000002, .000000004}, {-0.6, .5}}, Joined → True]], ImageSize → 600]
```

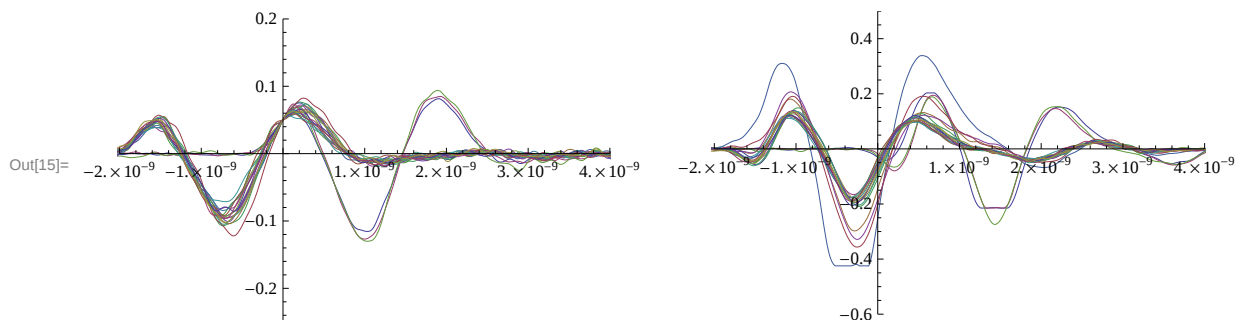

```
In[16]:= tnoisemax = t[noisemax]
```

```
Out[16]=  $-2.68056 \times 10^{-9}$ 
```

```
In[17]:= GraphicsRow[{{ListPlot[Transpose[{time, front}], Joined → True, Frame → True,
  FrameLabel → {"Amplitude(V)", }, {"time→", "Noise(front)"},
  PlotRange → {{-0.00000005, tnoisemax}, {-0.015, 0.015}},
ListPlot[Transpose[{time, back}], Joined → True, Frame → True,
  FrameLabel → {"Amplitude(V)", }, {"time→", "Noise(back)"},
  PlotRange → {{-0.00000005, tnoisemax}, {-0.015, 0.015}}]}, ImageSize → 600]
```

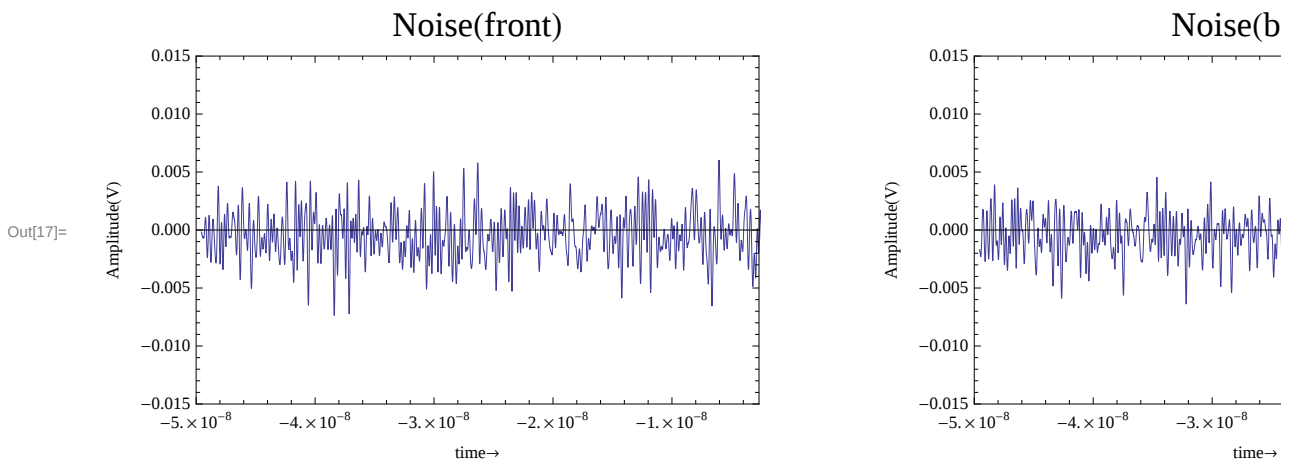

```
In[18]:= dt = time[[2]] - time[[1]] // EngineeringForm
f = 1 / (time[[2]] - time[[1]]);
fftrange = f / 2
```

```
Out[18]//EngineeringForm=
 $6.2 \times 10^{-12}$ 
```

```
Out[20]=  $8.06452 \times 10^{10}$ 
```

RMS noise and baseline

```
In[21]:= basef = {}; noisef = {}; baseb = {}; noiseb = {}; front1 = {}; back1 = {};
fbin = {}; bbin = {};
iwave = 1000;
```

```
In[24]:= Do[
  front1 = Take[Transpose[Import[Namelist[{itrace}], "Data"]][[2]], noisemax];
  back1 = Take[Transpose[Import[Namelist[{itrace}], "Data"]][[3]], noisemax];
  AppendTo[basef, Mean[front1]];
  AppendTo[baseb, Mean[back1]];
  AppendTo[noisef, RootMeanSquare[front1]]; AppendTo[noiseb, RootMeanSquare[back1]];
  , {itrace, iwave}]
```

```
In[25]:= avenoisef = Mean[noisef]
avenoiseb = Mean[noiseb]
```

```
Out[25]= 0.00319179
```


```
Out[26]= 0.00305551
```

```

In[27]:= Dimensions[basef]
GraphicsRow[
  {PairedHistogram[1000 * basef, Style[1000 * baseb, Red], ChartBaseStyle → Blue,
    ChartLabels → {"baseline-front (mV)", "baseline-back (mV)"}},
    PairedHistogram[1000 * noise, Style[1000 * noiseb, Red], ChartBaseStyle → Blue,
    ChartLabels → {"noise.rms-front", "noise.rms-back (mV)"}},
  Frame → All, ImageSize → 800]

```

Out[27]= {1000}

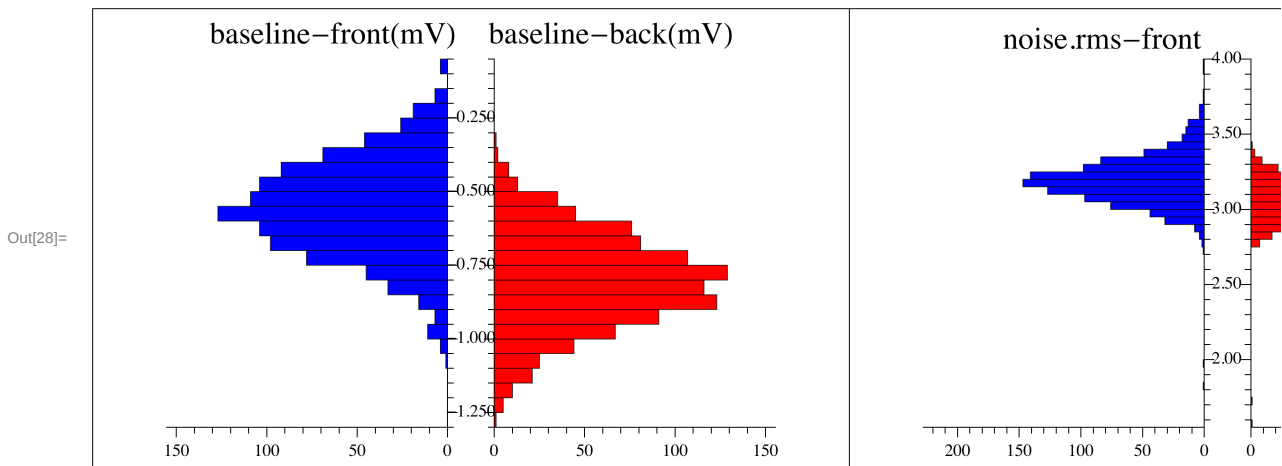

```

In[29]:= front1 = Take[Transpose[Import[Namelist[[1]], "Data"]][[2]], noisemax];
back1 = Take[Transpose[Import[Namelist[[1]], "Data"]][[3]], noisemax];
time1 = Take[Transpose[Import[Namelist[[1]], "Data"]][[1]], noisemax];

```

```

In[32]:= Ff = Interpolation[Transpose[{time1, front1}], Method → "Spline"];

```

```

In[33]:= Fb = Interpolation[Transpose[{time1, back1}], Method -> "Spline"]


```

```

Out[33]= InterpolatingFunction[{{{-4.95526 × 10-8, -2.6839 × 10-9}}, <>]

```

```
In[34]:= Plot[Ff[x], {x, -4.9586 × 10-8, -3 × 10-9},
  PlotRange → {{-4.9586 × 10-8, -3 × 10-9}, {- .015, .015}}]
```

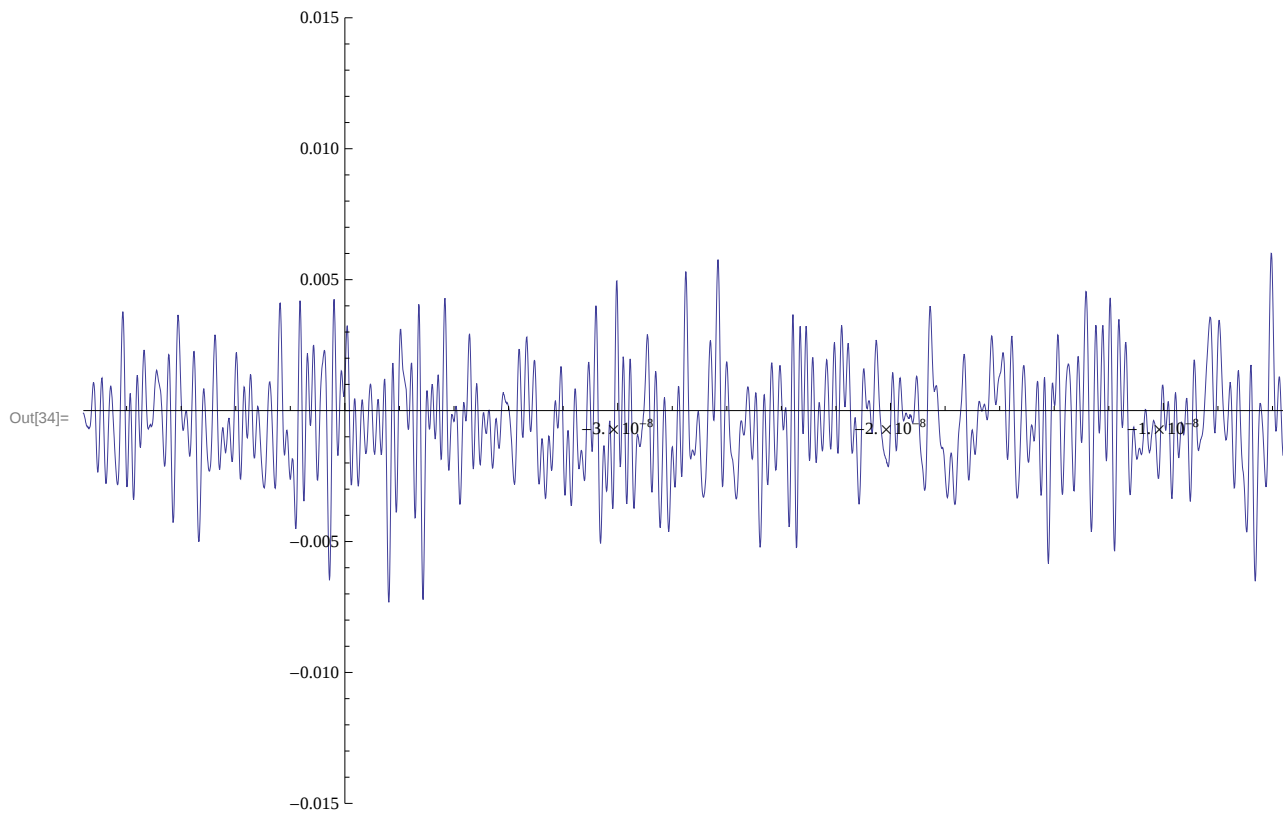


```
In[35]:= fftout1 = Abs[FourierDCT[front1]];
  df = fftrange / noisemax;

In[37]:= freq = Range[df, fftrange, df] / 1 000 000 000.;

In[38]:= fftnew = Transpose[{freq, fftout1}];
```


For this scope the Sampling frequency is much higher than the actual bandwidth. Therefore in the plots below there is a white noise distribution out to a few GHz. Above this (the scope bandwidth) there is an apparent reduction in noise. But in this region data are really reflecting the fact that high sampling frequency is really a figment of 'on - chip ' interpolation.

```
In[39]:= ListPlot[fftnew, Joined → True, AspectRatio → 0.3, ImageSize → Large, Frame → True,
  FrameLabel → {{}, {"Frequency (GHz)", "Spectral Composition of Noise"}},
  PlotRange → {{0, 6}, {0, .02}}]
```

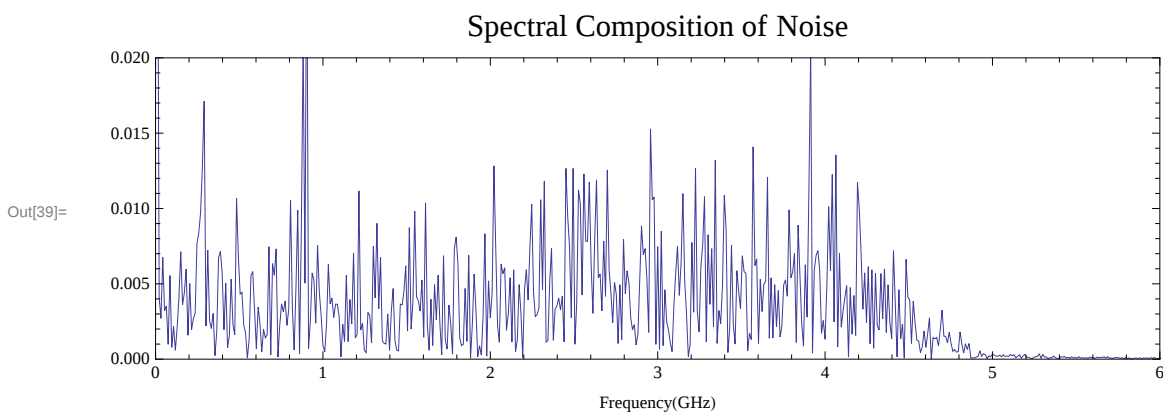

This has zero frequency in element 1. The 7693- th element corresponds to 1/2 the sampling frequency. After that aliasing takes over and the frequency heads back to zero.

```
In[40]:= ListLogPlot[fftnew, AspectRatio → 0.3, Frame → True,
  FrameLabel → {{}, {"Frequency (GHz)", "Spectral Composition of Noise"}},
  ImageSize → Large, PlotRange → {{0, 80}, {10-8, .02}}]
```

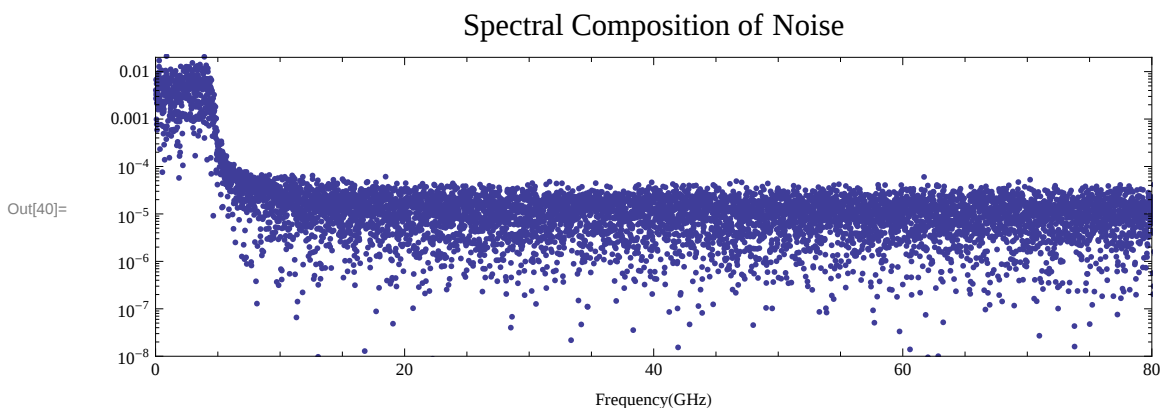

Initialize useful bin locations for region of interest and location of first peak in the waveform

```

In[161]:= peakbin = IntegerPart[bint[-1.5 × 10-9]];
          startbin = IntegerPart[bint[-2 × 10-9]];
          endbin = IntegerPart[bint[3 × 10-9]] - 1;
          timestrip = Take[time, {startbin, endbin}];

In[165]:= Clear[backstrip]; Clear[frontstrip];
          Clear[backs]; Clear[fronts];
          frontstrip = {}; backstrip = {}; isaved = 0; backs {}; fronts {};

          Do[
            frontraw = Transpose[Import[Namelist[[i]], "Data"]][[2]] - basef[[i]];
            (*baseline restoration on waveforms using average level of 1st 46.8 nsec*)
            backraw = Transpose[Import[Namelist[[i]], "Data"]][[3]] - baseb[[i]];
            If[backraw[[peakbin]] < 0.02, Goto["skipwave"], isaved++];
            (*first analyze events which trigger on the 2nd peak*)
            backs = Take[backraw, {startbin, endbin}];
            fronts = Take[frontraw, {startbin, endbin}];
            AppendTo[backstrip, backs];
            AppendTo[frontstrip, fronts];
            Label["skipwave"];
          , {i, 5}]

```



```

In[177]:= Dimensions[backstrip]
Dimensions[frontstrip]
{ListPlot[Transpose[{timestrip, backstrip[[1]]}],
  PlotStyle → Thick, PlotRange → {{-2 × 10-9, .1 × 10-8}, {- .12, .12}}],
  ListPlot[Transpose[{timestrip, frontstrip[[1]]}], PlotStyle → Thick,
  PlotRange → {{-2 × 10-9, .1 × 10-8}, {- .2, .2}}]}

```

Out[177]= {3, 800}

Out[178]= {3, 800}

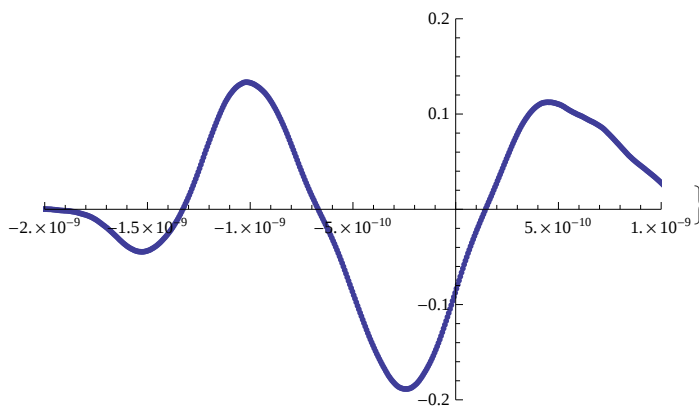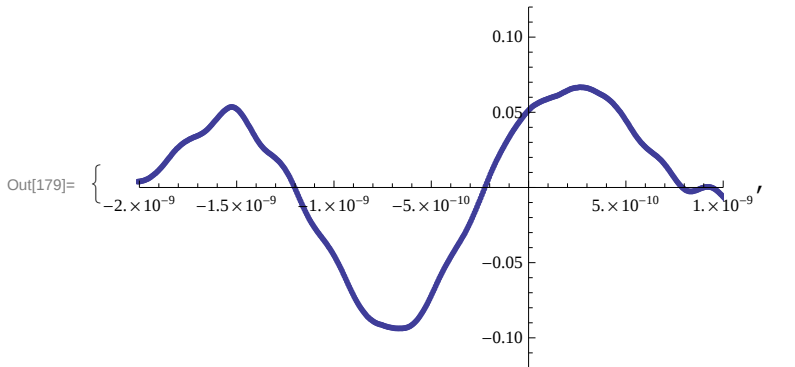

```
Wf = ConstantArray[0, 1000]; Wb = ConstantArray[0, 1000];
```

```


Do[
  Wf[[itrace]] =
    Interpolation[Transpose[{timestrip, frontstrip[[itrace]]}], Method → "Spline"];
  Wb[[itrace]] = Interpolation[Transpose[{timestrip, backstrip[[itrace]]}],
    Method → "Spline"];
  , {itrace, isaved}]

```


```
Zeroesb = x /. FindRoot[Wb[[#]][x], {x, -0.2 × 10-9}] & /@ Range[isaved];
```

```
Zeroesf = x /. FindRoot[Wf[[#]][x], {x, 0.1 × 10-9}] & /@ Range[isaved];
```

```
Plot[Table[Wb[[i]][x], {i, 1, 100}], {x, -1 × 10-9, .3 × 10-8}]
```

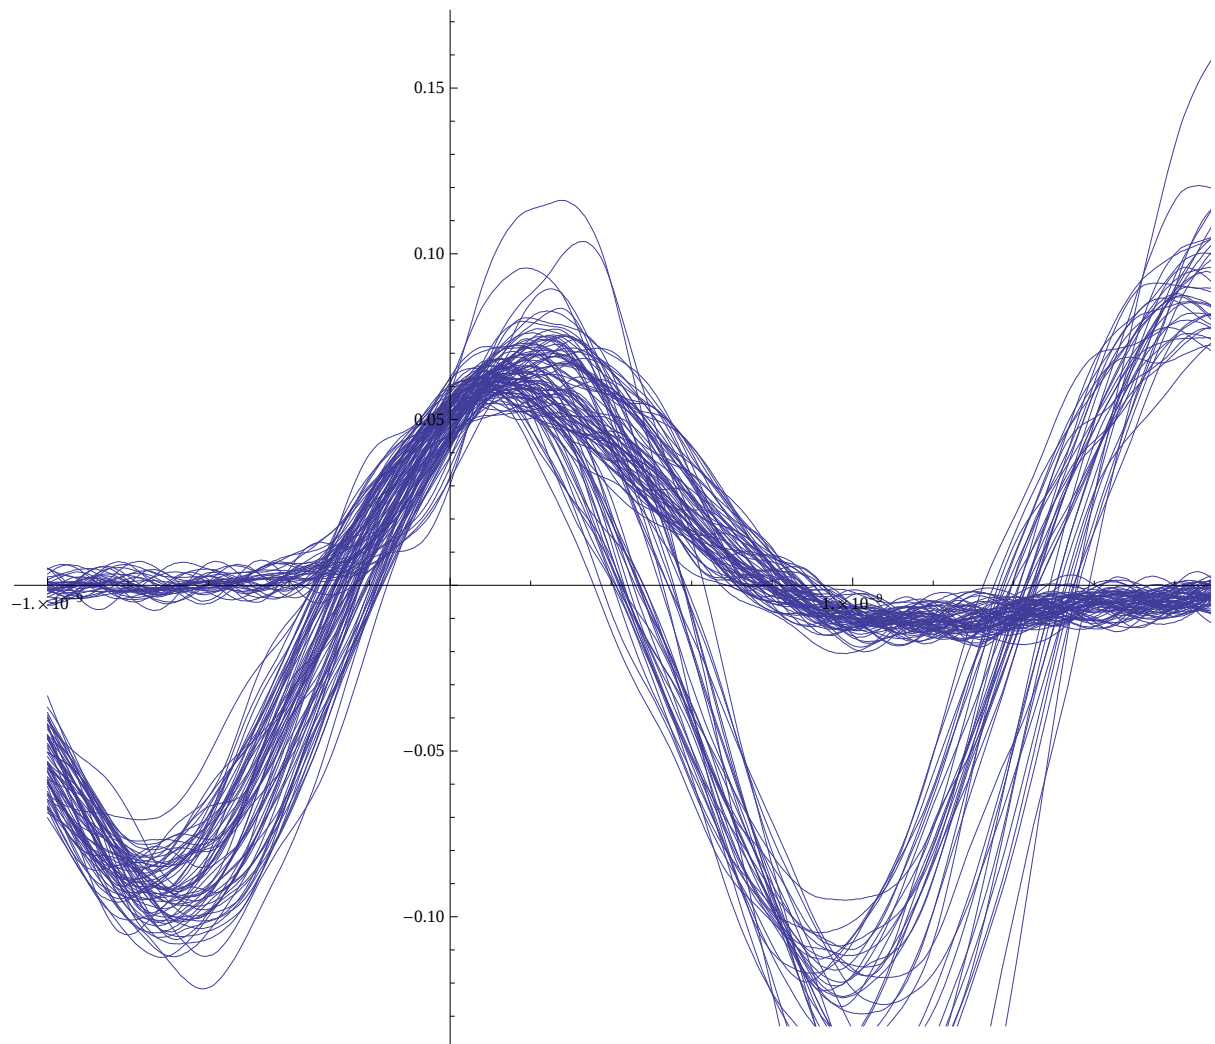

```
Difference = Table[(Zeroesf[[i]] - Zeroesb[[i]]), {i, 1, 100}];
Histogram[Difference, {0.3 × 10-9, 0.42 × 10-9, 0.015 × 10-9}]
```

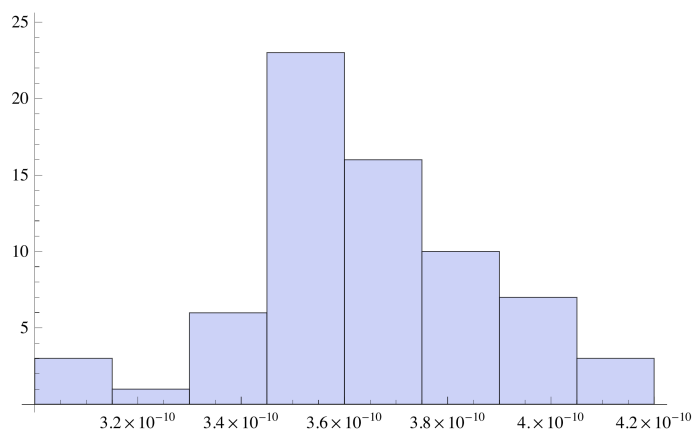

```
Dimensions[Zeroesf]
Dimensions[Zeroesb]
```

```
{1000}
```

```
Print[Zeroesb]
```

```
ListZb = ConstantArray[0, 1000];  
Do[  
  ListZb[[i]] := If[InexactNumberQ[Zeroesb[[i]]], Zeroesb[[i]],  $-10 \times 10^{-9}$ ];  
  , {i, 1000}]  
Dimensions[Zeroesb[[1]]]  
{}  
Print[Zeroesf]
```